


**CODE FORM**

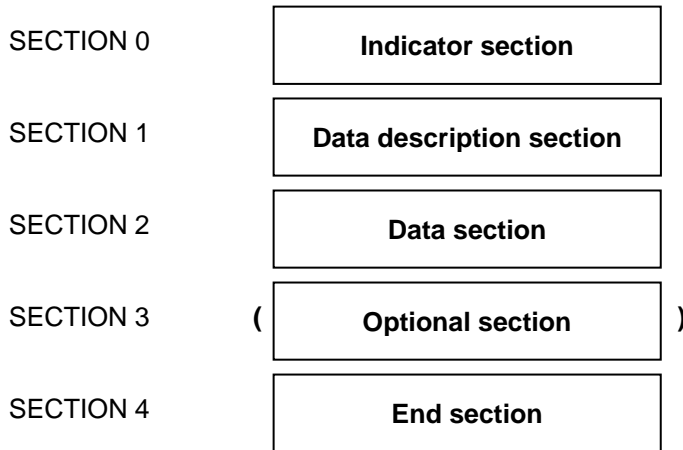

**Notes:**

- (1) CREX is the name of a character code for the representation and exchange of meteorological and other data.
- (2) CREX uses many of the principles of FM 94 BUFR.
- (3) CREX may be used for the exchange of data for which there is no suitable existing WMO code form.
- (4) A CREX message shall consist of one or more subsets of related meteorological data defined, described, and represented by a single CREX entity. For observational data, each subset shall correspond to one report.
- (5) A CREX message consists of sections:

<i>Section number</i>	<i>Name</i>	<i>Contents</i>
0	Indicator section	"CREX"
1	Data description section	CREX master table number, edition number, table version number, data category, then a collection of descriptors which define the form and content of data subsets making the data section, and an optional check digit indicator "E"
2	Data section	A set of data items defined by Section 1
3	Optional section	"SUPP" followed by additional items for local use
4	End section	"7777"

- (6) It will be noted that CREX representation is suitable for the manual encoding and visual display of meteorological and other data.

**REGULATIONS**

95.1 **General**

95.1.1 The beginning and ending of the data representation form shall be identified by the characters "CREX" and "7777", respectively.

95.1.2 Information within CREX shall be character coded.

- 95.1.3 A group is a sequence of one or more contiguous characters corresponding to a single data descriptor or data value. Groups shall be separated from each other by one or more space characters. Multiple space characters shall be used when needed to improve human readability.
- 95.1.4 The subset terminator shall be represented by the character string "+". The subset terminator shall not be used when the subset is the last subset.
- 95.1.5 The section terminator shall be represented by the character string "++". The section terminator shall additionally function as a subset terminator for the last subset.
- 95.2 **Section 0 – Indicator section**
- 95.2.1 Section 0 shall be four characters long consisting of the character sequence “CREX”.
- 95.3 **Section 1 – Data description section**
- 95.3.1 The data description section shall begin with the CREX table descriptor starting with the letter T and followed by a six-digit number (tteevv) without separator character. The first two digits (tt) shall define the CREX Master Table used (tt = 00 if the standard WMO FM 95 CREX tables are used). The next two digits (ee) shall indicate the CREX edition number used and the last two digits (vv) shall indicate the CREX table version number used.
- 95.3.2 Immediately following the CREX table descriptor and a space character as separator, Section 1 shall contain a three-digit reference to CREX Table A, preceded by the letter A.
- 95.3.3 **Data description syntax for CREX:**
- 95.3.3.1 After the CREX table descriptor and the CREX Table A descriptor, Section 1 shall have one or more data descriptor(s). Data descriptors shall be preceded by a space character as separator. Data descriptors shall occupy six characters. Each descriptor shall have three parts: F (1 letter), xx (2 digits), yyy (3 digits or – (minus sign) followed by two digits for C02yyy data description operator for negative scales – see CREX Table C).
- 95.3.3.2 The first part (F) of a data descriptor shall be: B, C, D or R.
- 95.3.3.3 If F = B, the descriptor shall function as “element descriptor”, and it shall define a single data item by reference to CREX Table B named: Bxyyy.
- 95.3.3.4 If F = C, the descriptor shall function as “operator descriptor”, and it shall define an operation by reference to CREX Table C named: Cxyyy.
- 95.3.3.5 If F = R, the descriptor shall function as "replication descriptor". The two digits “xx” shall define the number of following descriptors to be repeated the number of times defined by the three digits “yyy”. If “yyy” equal “000”, the descriptor defines a delayed replication. Delayed replication is the replication of data values of which the number of replication is known only in the observed report and will therefore be part of the data section (for example: number of levels in a sounding). A corresponding number of four digits in the data section shall then define the number of replications of the data values corresponding to the following xx descriptors in the data description section.
- 95.3.3.6 If F = D, the descriptor shall function as “sequence descriptor”, and it shall define a list of element descriptors, replication descriptors, operator descriptors and/or sequence descriptors by reference to CREX Table D and named: Dxyyy.
- 95.3.4 CREX Table B shall define the element descriptors. If one entry in CREX Table B and one entry in BUFR Table B have the same table reference, the element name shall be the same in both tables. CREX Table B entries shall contain:
- (a) The table reference (B xx yyy);
  - (b) The element name (64 characters maximum);

- (c) The units to be used for data representation in CREX, or instead, a reference to a code table or flag table which will then define the possible data value for the element;
- (d) The scale factor to be applied to the data value for CREX purposes; the scale defines the precision of the value. No decimal points shall be used in the data section, so a positive scale means that so many figures after the decimal point are included (e.g. scale = 2 means values coded in hundredths, e.g. height coded in centimetre). A negative scale means that so many figures before the decimal point are not included (e.g. heights in hundreds of metres would have scale = -2);
- (e) The number of characters to be used in CREX to represent the corresponding data value (without counting the sign);
- (f) Reference values for CREX elements are always zero and there shall be no column for this attribute in CREX tables.

Note: Each entry in CREX Table B defining element descriptor should correspond with entries in BUFR Table B and listed in the same table, in Part B, Binary codes, BUFR/CREX Table B.

95.3.4.1 Units should be based on standard international units of the SI system. Alternatively, in exceptional cases, consideration may be given to other standard common units used by the data producer and the users, where a convincing case can be made that those units are more appropriate. In such a case, priority shall be given to units contained in WMO Common Table C-6 or, in the case of descriptors for aviation products, ICAO Annex 5.

95.3.4.2 An operator descriptor shall be used to define change of unit, scale, or data width. The change shall apply only to the data value of the element referenced in the following element descriptor. The "yyy" digits of the operator descriptor shall define the new unit (yyy being equal to the code figure of the new unit defined in Common Code table C-6 listing all the possible units), the new scale or the new data width. The original Table B unit, scale or data width shall be back in force again for that element when subsequently referenced in the data description section until a new change occurs.

Note: Change of unit, scale or data width should be avoided; it should be only a last resort solution. These changes are not recommended in a common CREX Table D sequence. The change operators should not be used when the end user of the message would be a human reader.

95.3.4.3 CREX code tables shall have the same code figures as BUFR code tables. As CREX code tables are generally longer than corresponding BUFR code tables (for example: 99 entries rather than 63), the value corresponding to "Missing" and the values over within the BUFR code table shall be declared "Not used" within the corresponding CREX table ("63" to "99" Not used, in the example).

95.3.4.4 CREX flag tables shall be the same as BUFR flag tables. However, in CREX, flag tables shall be expressed using the octal representation in the following way: a set of three bits being represented by a figure from 0 to 7 (the leftmost bit being the first bit in the table rank), zeros being added on the left when the number of flags is not a multiple of 3:

- 000 = 0 (no bit set)
- 001 = 1 (bit 3 set)
- 010 = 2 (bit 2 set)
- 011 = 3 (bits 2 and 3 set)
- 100 = 4 (bit 1 set)
- 101 = 5 (bits 1 and 3 set)
- 110 = 6 (bits 1 and 2 set)
- 111 = 7 (all bits set).

For example, the seven flag table sequence "1100110" transformed with the addition on the left of two zeros to "001100110" would be translated to "146" in octal.

Missing value for a flag table shall be indicated by a set of solidi "/" covering the data width.

95.3.5 Element descriptors corresponding to the following classes in CREX Table B shall remain in effect until superseded by redefinition:

Class

00	Reserved
01	Identification
02	Instrumentation
03	Reserved
04	Location (time)
05	Location (horizontal-1)
06	Location (horizontal-2)
07	Location (vertical)
08	Significance qualifiers
09	Reserved

Note: Redefinition is effected by the occurrence of element descriptors which contradict the preceding element descriptors from these classes. If two or more elements from the same class do not contradict one another, they all apply.

95.3.5.1 The consecutive occurrence of two identical element descriptors or identical sets of element descriptors from Classes 04 to 07, inclusive, shall denote a range of values bounded by the corresponding element values. This enables the definition of layers and simple time periods.

95.3.5.2 The definition of line, areas, volumes and more complex time attributes shall be accomplished using descriptors from Classes 04 to 07 in association with suitable descriptors from Class 08.

95.3.5.3 The consecutive occurrence of two or more non-identical element descriptors from Classes 04 to 07, inclusive, shall infer that all such elements remain in effect until redefined, unless such elements define an increment.

95.3.5.4 Data items defined by element descriptors in Class 10 or above shall not behave as coordinates with respect to subsequent data.

95.3.5.5 Increments:

Any occurrence of an element descriptor from Classes 04 to 07 which defines an increment shall indicate that the location corresponding to that class shall be incremented by the corresponding data value. In the case of successive increments from the same class, this means that each increment shall apply in a cumulative manner, with all preceding increments remaining in effect.

Displacements:

In contrast, any displacement descriptor from Classes 04 to 07 does not redefine the location corresponding to that class, but shall define only a transient displaced location from the location corresponding to that class. In the case of successive displacements from the same class, this means that each displacement shall apply independently and in a non-cumulative manner to the location corresponding to that class.

95.3.5.6 Time or location increment descriptors, from Classes 04 to 07 inclusive, may be associated with replication descriptors in the following way: when an increment descriptor immediately precedes a replication descriptor, or is separated from it by one or more operator descriptors from Table C, this shall signify that such increments shall be applied for each replication; the application of the increments shall take effect from the beginning of each defined replication, including the first.

95.3.5.7 If a CREX message is made up of more than one subset, each subset shall be treated as though it was the first subset encountered.

95.3.6 A check digit indicator is optional at the end of section 1. If present, it shall take the form of the single character "E".

**95.4 Section 2 – Data section**

- 95.4.1 The data section shall be comprised of one or more subsets of groups. Each group shall represent one data value. The sequence of data values shall correspond in order to the list of descriptors defined by Section 1 and shall be terminated by subset terminator, or, in the case of the last subset, by the section terminator.
- 95.4.2 Each data value shall be coded using the number of characters defined in the CREX Table B entry of the corresponding direct element descriptor in Section 1 or of the corresponding element descriptor within a sequence of descriptors defined by a sequence descriptor in Section 1. However, values of the CREX Table B entry, which are equal to or beyond the missing value of the corresponding BUFR Table B entry, shall not be used. If the data value is a number defining a delayed replication (descriptor "Rxx000" in Section 1), it shall comprise four digits.
- 95.4.3 Each numerical data value shall include leading zeroes when the number of digits required to represent the value is smaller than the number of characters defined in the corresponding CREX Table B entry or for the delayed repetition number, to keep the number of characters representing the data value always equal to the original data width defined in CREX tables or Regulations, in order to facilitate the presentation alignment and the decoding process.
- 95.4.4 Positive numerical data values shall be unsigned. Negative numerical data values only shall be signed and represented with the negative sign immediately preceding the data value.
- 95.4.5 Each data value having a unit defined as character shall include trailing blanks when the number of characters required to represent the data value is smaller than the number of characters defined in the corresponding CREX Table B entry, to keep the number of characters representing the data value always equal to the original data width defined in CREX tables, in order to facilitate the presentation alignment and the decoding process.
- 95.4.6 A missing value shall be represented as a group of solidi "/" characters equal in number to the number of characters normally required to represent the value concerned.
- 95.4.7 If the check digit indicator "E" is present at the end of Section 1, a check digit shall be added in front of each data value, immediately preceding the first character of each data value. The check digit shall take the value of the unit digit of the ordered number of the data value, counting along the data subset in which it is contained, starting from 0 (the digit increases from 0 to 9 cyclically). The check digit shall precede immediately the negative sign if the data value is negative.

**95.5 Section 3 – Optional section**

- 95.5.1 Section 3 is optional and if present, shall contain additional items as may be defined within each centre for specific use.
- 95.5.2 Section 3, if present, shall start with the four-character sequence "SUPP" and shall end with a section terminator.

**95.6 Section 4 – End section**

- 95.6.1 Section 4 shall be four characters long coded as "7777". Section 4 shall not have a section terminator.